

We are glad to inform you that, a new model has been introduced in our range of hydraulic 2 post lifts: **TECO HC4002 B SE**.

TECO HC4002 B SE is a new hydraulic 2-post lift with base-connection, whose sale target is intended for extra-CE market, since this lift is not CE-certified. It is compliant with AS/NZL regulations: AS/NZS 1418.9:1996 - Vehicle Hoists and AS/NZS 2550.9:1996 - Safe Use Vehicle Hoists.




► Main characteristics

- Lifting Capacity: 4000 kg
- New armset designed and tested for following AS/NZS load distribution (60:40), stronger than that of many other competitors following 50:50 ratio. Compared to competitors, cycle test with 10.000 cycles and load tests with 125% overload performed.
- Improved hydraulic circuit, for long term stable and synchronized system without a lot wear and tear

N. 22 23/06/2026


- Simple and completely manual operation: economic model
 - Single-side manual unlock system for a quicker and easier release of the carriage: compared to many other competitors' systems (2-side release), this system is quicker and safer!
 - Manual descent by pressure lever guarantees a safe, controlled lowering

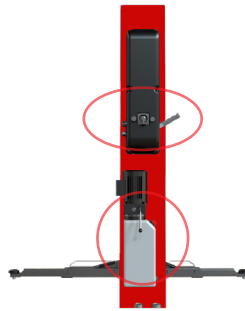

- Chain-drive carriage for a reliable lifting
- Operation by high efficiency pushing cylinders and synchronization cables.
- Simple and completely manual operation: economic model
- 2 stage + 2 stage lifting arms, with single stage lifting pad with min. height 100 mm (max 140) for versatile vehicle coverage
- Rubber door protections and feet protectors
- Toothed sector arm rotation stop system



rubber guards

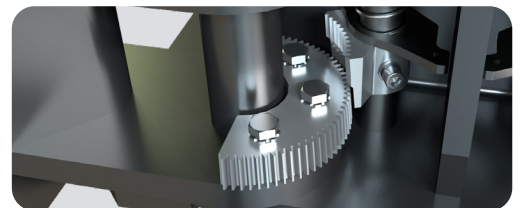


- Low concrete thickness needed (140mm basing on anchor bolts)

► Units which can be contained in full containers

24 units in a 20" container

40 units in a 40" container

► Dimensions

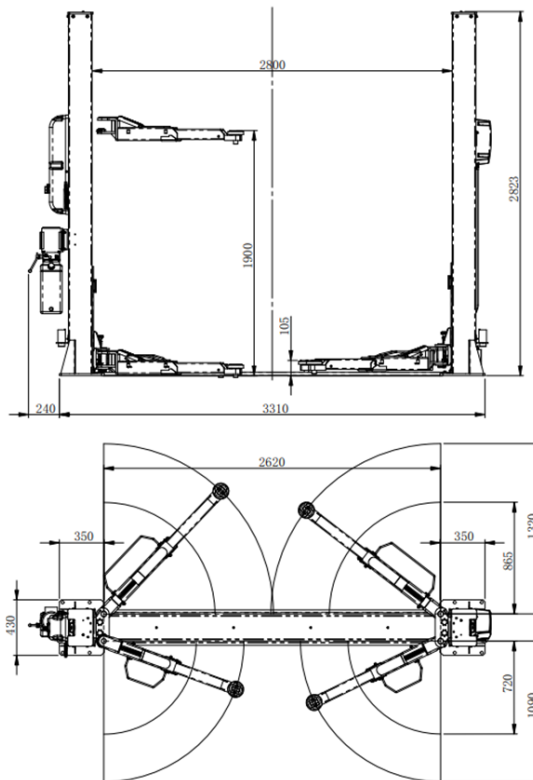

► Technical data

| | |
|--------------------------|--|
| Lifting capacity | 4000 kg |
| Lifting time | 40 s |
| Lowering time | 40 s |
| Minimum useful height | 105 mm |
| Lifting height | 1900 mm |
| Distance between columns | 2800 mm |
| Lift max height | 2823 mm |
| Electric motor | 230/400 v - 3 Ph - 50/60 Hz 230 v - 1 Ph - 50/60 Hz |
| Recommened hydraulic oil | ESSO NUTO H32 or equivalent (ISO VG32) _ 10 L |

The depliant is already available for consultation on our website. Please find it in the [following link](#).